


1000V INSULATED TORQUE WRENCH



EGA Master insulated tools comply with IEC 60900 international standard, each one of the pieces being tested at 10,000V (10 times the voltage we certify). They are also tested rigorously according to what the norms establishes: adherence test, impact test, flame propagation test and dielectric penetration test.

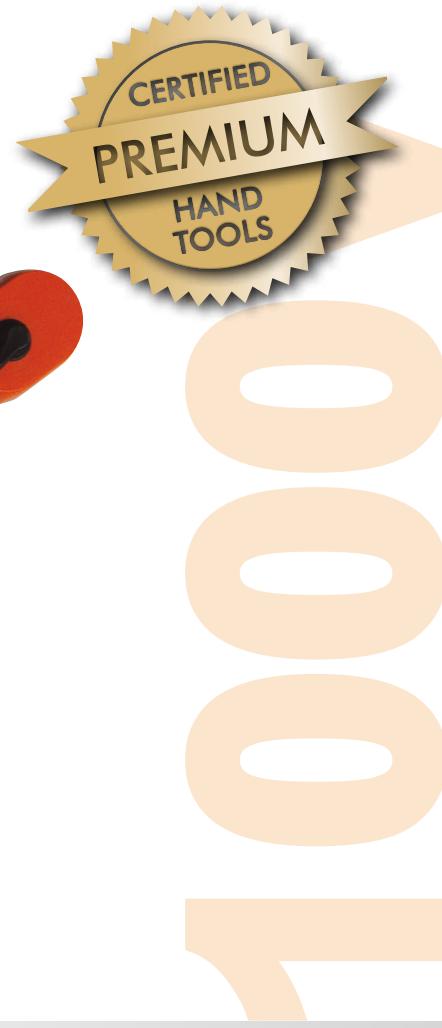

MAIN APPLICATION FIELDS

Electrical installation	High Voltage networks	Fire-fighters	Automotive
Power Plants	Low Voltage networks	Lighting installation and repair	Railway industry
Electric Stations and substations	Telecommunications	Aeronautical	Electrical component maintenance

CAUTION

- 1 Don't ever use tools under voltage if they present pores, fissures, encrusted elements or if the white insulation layer is visible.
- 2 **Insulating floors and safety shoes** are recommended to work under voltage.
- 3 **Avoid contact with water** while working under voltage.
- 4 **Do not ever touch directly any item that may be under voltage.** Use a voltage tester to check first.

1000V INSULATED TORQUE WRENCH

EGA Master 1000V torque Wrenches are the perfect tools for controlled tightening thanks to their precision, endurance and variety. They are particularly suitable for high voltage work and electrical assembly applications.

Individual box.

Anti-slippery handle.

Both right and left tightening is possible.

1000V INSULATED TORQUE WRENCH

COD	3/8"	N.m	Lb.in	L(mm)	Kg.	
79433	3/8"	5-25	44,2-211	370	1,1	1



1.000V
IEC 60900

TECHNICAL SPECIFICATIONS

MATERIAL	Torque wrench	Steel
	Insulation	ABS
HARDNESS	Square drive	46-52 HRc
FINISH	RAL 2009 orange color and black color	
TEETH	72	

COD	3/8"	N.m	L(mm)	Kg.	
75034	3/8"	5-50	300	0,85	1
75024	3/8"	20-100	400	1	



1.000V
IEC 60900

TECHNICAL SPECIFICATIONS

MATERIAL	Torque wrench	Acero
	Insulation	PP+TPR
DUREZA	Square drive	46-52 HRc
FINISH	RAL 2009 orange color and black color	
TEETH	72	

1000V INSULATED TORQUE WRENCH

COD	1/2"	N.m	Lb.ft	L(mm)	Kg.	
79435	20-200	15-150	500	1,4	1	



TECHNICAL SPECIFICATIONS

MATERIAL	Torque wrench	Steel
	Insulation	ABS+TPR
HARDNESS	Square drive	46-52 HRc
FINISH	RAL 2009 orange color and black color	
TEETH	72	



1000V