

SCREWDRIVERS MICROTRONIC

EGA Master Microtronic screw drivers are convenient for electronic equipment works. Screw driver head is designed to provide an effective support in the 3 microtechnical positions.



Magnetic tip
High precision work



1. Rotatory head for optimizing rotatory movement.



2. Each type of tip has different colour, enabling easy location at first glance.




3. Handle anti-slippery design enable easy and comfortable usage, fitting perfectly to user's hand. The narrow part enable good grip for quick turn.

4. High precision chrome vanadium wire, providing long life to the tool.




ELECTRICIAN

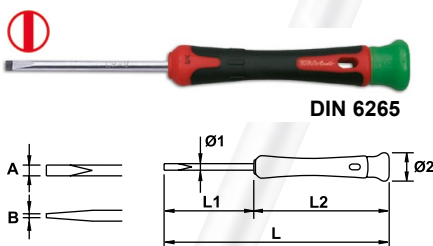

MM


COD	A	B	Ø1(mm)	L1 mm	L2 mm	L mm	Ø2(mm)		
66846	2	0,4	3	50		145			
66847	2	0,4	3	50		145			
66848	3	0,5	3	75	95	170	21	10	1
66849	4	0,8	4						

ELECTRICIAN

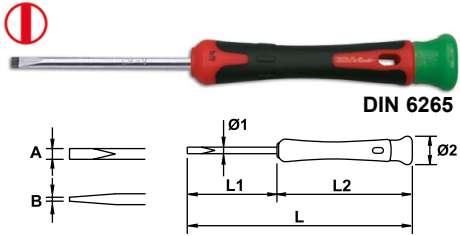

INCH.


COD	A	B	Ø1(mm)	L1	L2	L	Ø2(mm)		
55449	5/64"	0,016"	3	2"		145		10	1
55450					95		21		
55451	1/8"	0,02"		3"		170			
55452	5/32"	0,03"	4						

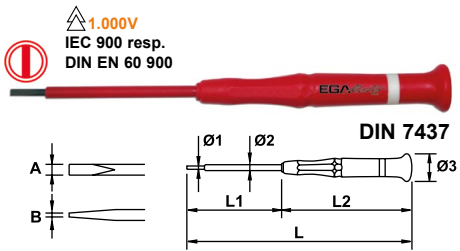


1 000 V

COD	A	B	Ø1(mm)	Ø2(mm)	L1	L2	L	Ø3(mm)		
75156	1,5	0,23	1,5	3,1	40		140			
75157	1,8	0,3	1,8	3,4						
75158	2	0,4	2	3,6	60	100	160	19	10	1
75159	2,5		2,5	4,1						
75201	3	0,5	3	4,6	75		175			

PHILIPS

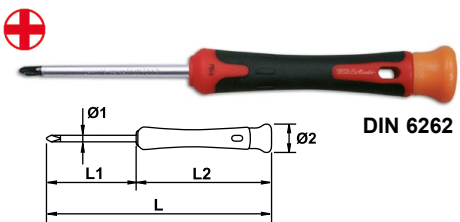


COD		Ø1(mm)	L1	L2	L	Ø2(mm)		
66850	PH-00	2	50		145	21	10	1
66851	PH-0	3		95				
66852	PH-1	4	75		170			

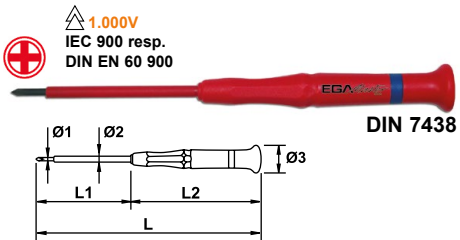

1 000 V


COD		Ø1(mm)	Ø2(mm)	L1	L2	L	Ø3(mm)		
75202	PH-00	2,5	4,1	75	100	175	19	10	1
75203	PH-0	3	4,6						

POZIDRIV

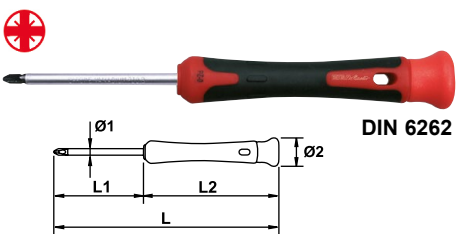


COD		Ø1(mm)	L1	L2	L	Ø2(mm)		
66853	PZ-0	3	50	95	145	21	10	1
66854	PZ-1	4	75		170			

TORX

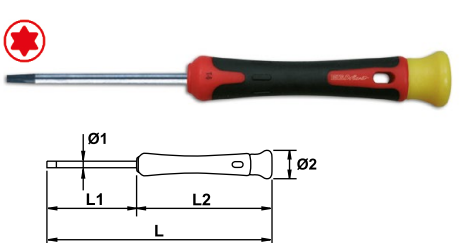


COD		Ø1(mm)	L1	L2	L	Ø2(mm)		
66855	T-6	2						
66856	T-7		50		145			
66857	T-8	3						
66858	T-9			95		21	10	1
66859	T-10							
66860	T-15	75			170			
66861	T-20	4						

TAMPER TORX

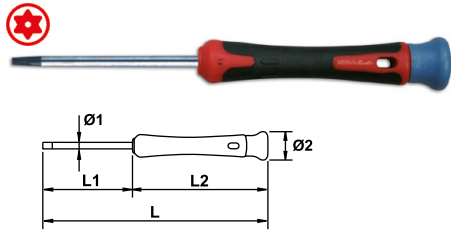


COD		Ø1(mm)	L1 mm	L2 mm	L mm	Ø2(mm)		
66866	TT-6	2	50	95	145	21	10	1
66867	TT-7	3						
66868	TT-8	3	75	95	170	21	10	1
66869	TT-9	3						
66870	TT-10	3	75	95	170	21	10	1
66871	TT-15	4						
66872	TT-20	4	75	95	170	21	10	1
66872	TT-20	4						

HEXAGONAL BALL POINT

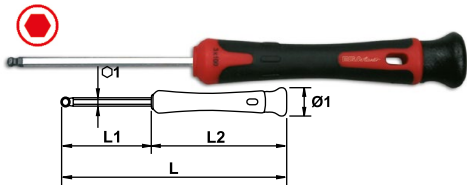

MM

COD	HEX 1(mm)	L1 mm	L2 mm	L mm	Ø1(mm)		
66862	1,5	50	95	145	21	10	1
66863	2						
66864	2,5	60	95	155	21	10	1
66865	3						

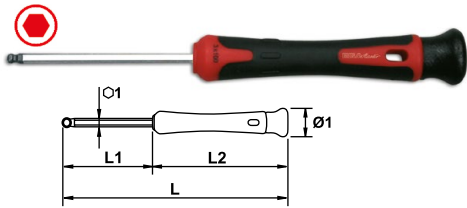

INCH.

COD	HEX 1	L1 mm	L2 mm	L mm	Ø1(mm)		
55454	1/16"	2"	95	145	21	10	1
55455	5/64"						
55457	1/8"	60	95	155	21	10	1
55457	1/8"						

MICROTRONIC SETS








100 PCS.

COD	pcs.	Dimensions	Symbol
66994	5	2x50	
		2x75	
		3x75	
		4x75	
		PH00	
		PH0	
		PH1	
		PZ0	
		PZ1	
		T6	
		T7	
		T8	
		T9	
		T10	
		T15	
		T20	
1,5x50			
2x50			
2,5x50			
3x60			

MICROTRONIC SETS






100 PCS.

COD	pcs.		
66990	5	2x50	    
		2x75	
		3x75	
		4x75	
		PH00	
		PH0	
		PH1	
		PZ0	
		PZ1	
		TT6	
		TT7	
		TT8	
		TT9	
		TT10	
		TT15	
		TT20	
		1,5x50	
2x50			
2,5x50			
3x60			



6 PCS.

COD	pcs.		
66999	1	2x50	  
		3x75	
		PH00	
		PH0	
		PZ0	
PZ1			





8 PCS.

COD	pcs.		
69496	1	Pinza	69530
		Minis para electrónica	62526 (130mm)
			62527 (130mm)
			62528 (150mm)
			62529 (115mm)
			62531 (110mm)
		Microtronics	66846 (2x50)
	66850 (PH00)		



7 PCS.

COD	pcs.		
76083	1	1,5x40	 
		1,8x60	
		2x60	
		2,5x75	
		3x75	
		PH00	
		PH0	

TECHNICAL SPECIFICATIONS

MATERIAL	Handles	PVC + TPR / 1000V= PP
	Wire	CR-V / 1000V= Nickel-Chrome-Molybdenum steel
HARDNESS	Wire	50-55 HRc
FINISH	Wire	Matt Chrome plated
	Tip	Black magnetic / 1000V= No black magnetic