

# SLIM DOUBLE OPEN ENDED RING WRENCHES




EGA Master's slim double open-ended ring wrenches are the very best solution for tightening and loosening operations in confined spaces, for example in automotive, aerospace and marine applications.

**Ultra-slim**



1. Designed for use in low and poor access areas.
2. Ultra compact head, extra-slim walls and longer than conventional shafts.
3. Manufactured from **chrome-vanadium** steel, this wrench is designed to support high torque values without breaking, providing increased durability.

## SLIM DOUBLE OPEN ENDED RING WRENCHES 15° BENT

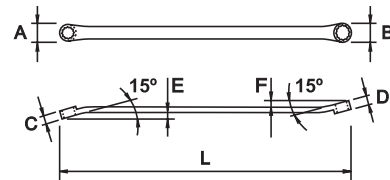

COD	AF	L mm	A	B	C	D	E	F	gr.		
56230	7/32"-1/4"	205	11	13	6,5	8,0	4,0	4,0	50	10	1
56231	1/4"-5/16					7,5					
56232	5/16"-3/8"	235	13	16	8,0	4,5	6,0	70	10	1	
56233	3/8"-7/16"										9,0
56234	1/2"-9/16"	330	20	22	10	11	8,0	160			

Cr-V AS95E


**SLIM DOUBLE OPEN ENDED RING WRENCHES 15° BENT SET**

**COD** UN.

56240	5	7/32"-1/4", 1/4"-5/16", 5/16"-3/8", 3/8"-7/16", 1/2"-9/16"
-------	---	--



**SLIM FLAT DOUBLE OPEN ENDED RING WRENCHES**

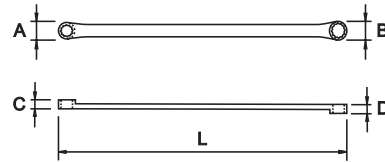

**COD**

**AF**

COD	AF	L mm	A	B	C	D	gr.		
56235	7/32"-1/4"	205	11	13	6,5	7,5	50	10	1
56236	1/4"-5/16"					7,5			
56237	5/16"-3/8"	235	13	16	8,0	75			
56238	3/8"-7/16"	290	16	19	8,0	9,0	115		
56239	1/2"-9/16"	330	20	23	9,5	11	160		

Cr-V DIN 838

**SLIM FLAT DOUBLE OPEN ENDED RING WRENCHES SET**

**COD** UN.

56241	5	7/32"-1/4", 1/4"-5/16", 5/16"-3/8", 3/8"-7/16", 1/2"-9/16"
-------	---	--



# TECHNICAL SPECIFICATIONS

<b>MATERIAL</b>	Cr-V
<b>MINIMUM HARDNESS</b>	44-50 HRc
<b>FINISHING</b>	Aerospatial Chrome Plating

UNLIMITED GUARANTEE