


# SLOGGING RING WRENCH THIN WALL


Ega Master Slogging Ring Wrench Thin Wall are designed to **tighten or loosen large nuts and bolts in ship-building and other heavy industries, maintenance of industrial plants.**

Both in mm and inches

**1.** It has been designed for places with difficult access, where conventional slogging wrenches can't reach.

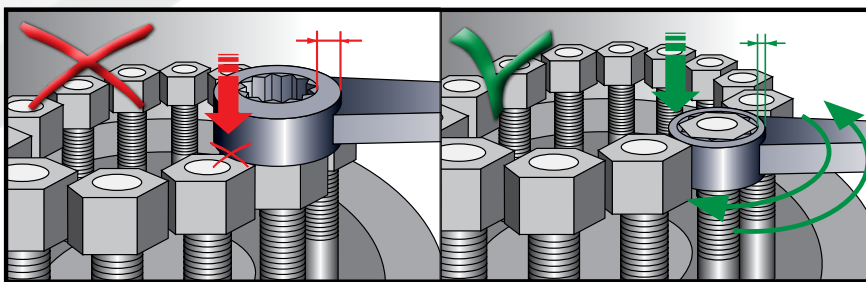

## SLOGGING RING WRENCH THIN WALL



MM

| COD   | AF   | L<br>mm | A  | B  | C  | gr.  |   |   |
|-------|------|---------|----|----|----|------|---|---|
| 56300 | 27mm | 250     | 43 | 16 | 17 | 600  |   |   |
| 56301 | 30mm | 256     | 47 | 18 | 19 | 750  |   |   |
| 56302 | 32mm | 260     | 49 | 19 | 19 | 750  | 5 | 1 |
| 56303 | 36mm | 270     | 55 | 22 | 21 | 1050 |   |   |
| 56304 | 41mm | 278     | 61 | 24 | 23 | 1250 |   |   |
| 56305 | 46mm | 287     | 67 | 26 | 24 | 1500 |   |   |
| 56306 | 50mm | 296     | 72 | 28 | 25 | 1750 | 1 | - |
| 56307 | 55mm | 303     | 78 | 30 | 27 | 2000 |   |   |

**SLOGGING RING WRENCH THIN WALL**



**MM**

| <b>COD</b> | <b>AF</b> | <b>L</b><br>mm | <b>A</b> | <b>B</b> | <b>C</b> | <b>gr.</b> |   |   |
|------------|-----------|----------------|----------|----------|----------|------------|---|---|
| 56308      | 60mm      | 315            | 85       | 33       | 28       | 2350       |   |   |
| 56309      | 65mm      | 322            | 93       | 35       | 29       | 2650       |   |   |
| 56310      | 70mm      | 325            | 99       | 37       | 30       | 2900       |   |   |
| 56311      | 75mm      | 338            | 106      | 39       | 31       | 3300       |   |   |
| 56312      | 80mm      | 348            | 112      | 42       | 32       | 3700       |   |   |
| 56313      | 85mm      | 350            | 119      | 43       |          | 4000       |   |   |
| 56314      | 90mm      | 353            | 126      |          | 33       | 4250       | 1 | - |
| 56315      | 95mm      | 358            | 133      | 44       |          | 4600       |   |   |
| 56316      | 100mm     | 366            | 139      |          |          | 4900       |   |   |
| 56317      | 105mm     | 375            | 147      |          |          | 6500       |   |   |
| 56318      | 110mm     | 382            | 157      | 45       | 34       | 6500       |   |   |
| 56319      | 115mm     | 390            | 163      |          |          | 7200       |   |   |
| 56320      | 120mm     | 405            | 174      | 47       | 35       | 8000       |   |   |

**INCH.**

| <b>COD</b> | <b>AF</b> | <b>L</b><br>mm | <b>A</b> | <b>B</b> | <b>C</b> | <b>gr.</b> |   |   |
|------------|-----------|----------------|----------|----------|----------|------------|---|---|
| 56321      | 1.1/16"   | 250            | 43       | 16       | 17       | 600        |   |   |
| 56322      | 1.1/4"    | 260            | 49       | 19       | 21       | 750        |   |   |
| 56323      | 1.7/16"   | 270            | 55       | 22       | 21       | 1050       | 5 | 1 |
| 56324      | 1.5/8"    | 278            | 61       | 24       | 22.5     | 1250       |   |   |
| 56325      | 1.13/16"  | 287            | 67       | 26       | 24       | 1500       |   |   |
| 56326      | 2"        | 296            | 72       | 28       | 25       | 1750       |   |   |
| 56327      | 2.3/16"   | 303            | 78       | 30       | 26.5     | 2000       |   |   |
| 56328      | 2.3/8"    | 315            | 85       | 33       | 28       | 2350       |   |   |
| 56329      | 2.9/16"   | 322            | 93       | 35       | 29       | 2650       |   |   |
| 56330      | 2.3/4"    | 325            | 99       | 37       | 30       | 2900       | 1 | - |
| 56331      | 2.15/16"  | 338            | 106      | 39       | 31       | 3300       |   |   |
| 56332      | 3.1/8"    | 348            | 112      | 42       | 32       | 3700       |   |   |
| 56333      | 3.1/2"    | 353            | 126      |          | 33       | 4250       |   |   |
| 56334      | 3.7/8"    | 366            | 139      | 44       | 33       | 4900       |   |   |

# TECHNICAL SPECIFICATIONS

| <b>MATERIAL</b>  | Cr-Steel                       |             |
|------------------|--------------------------------|-------------|
| <b>HARDNESS</b>  | 27mm-46mm<br>1.1/16" -1.13/16" | 30-40 HRC   |
|                  | 50mm-120mm<br>2" - 3.7/8"      | 30 – 36 HRC |
| <b>FINISHING</b> | Phosphated                     |             |