

TORQUE AND ANGLE WRENCHES

EGA Master **EGATORIK** Torque and angle Wrenches are by their precision, strength and variety, the perfect tools for controlled tightening.



With rectangular joint (9x12/14x18) or ratchet



1. Data recording and communication system (for models with communication cable).

2. Available 9 pre-set torque parameters and 250 torque tightening operations data memory.

3. Progressive switching on of the light leds and acoustic signal when approaching the preset value.

4. Oversized ergonomic & anti-slippery handles.

5. Two measurement modes:
M1: for the verification of tightening torque and **M2:** for **Peak** (maximum torque value) & **Track** (current torque value).

6. With universal rectangular joint and a wide range of different interchangeable heads available.

7. Measurement units: Nm, Lb.ft, Lb.in, Kg.cm.


8. 24h web calibration system.

9. Mirror polished chrome plating.

10. Individual carrying case.

EGATORK

TORQUE AND ANGLE WRENCHES

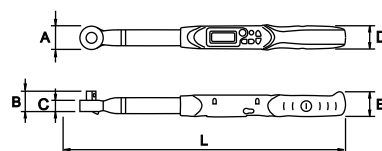


COD.	AF inch	Nm	Lb.ft	Lb.in	Kg-cm	L (mm)	A (mm)	B (mm)	C mm	D (mm)	E (mm)	∇	Kg	📦
58775	1/4"	1,5-30	1,11-22,12	13,3-265,5	15-306	390	25	25	16				0,8	
58776	3/8"	6,8-135	5-99,5	60-1195	69-1378	410	36	34	23	39	44	1-360°	1,0	1
58777														
58778	1/2"	10-200	7,4-147,5	88-1770	102-2041	510	43	44	28				1,4	
58779		17-340	12,5-250,7	150-3009	173-3469	630				1,5				

12M



9x12
14x18



COD.	mm	Nm	Lb.ft	Lb.in	Kg-cm	L (mm)	A (mm)	B (mm)	C mm	∇	Kg	📦
59014	9x12	1,5-30	1,11-22,12	13,3-265,5	15-306	390	25	25	16	1-360°	0,8	1
59015		6,8-135	5-99,5	60-1195	69-1378	410	36	34	23		1,0	
59016	14x18	10-200	7,4-147,5	88-1770	102-2041	510	43	44	28		1,4	1
59017		17-340	12,5-250,7	150-3009	173-3469	630				1,5		

12M

COD.	Accuracy CW (clockwise)	Accuracy CCW (counter clockwise)	Resolution	Data memory	Data communication To the computer	Cable for data communication
58775	±2	±3	0.01Nm 0.01 Lb.ft 0.1 Lb.in 0.1 Kg-cm	250	•	•
58776						
58777						
58778						
58779						
59014						
59015						
59016						
59017						

TECHNICAL SPECIFICATION

Calibration certificate	•
Warning systems	Audible and light alarm
Unit selection	N.m / Lb.ft / Lb.in / Kg.cm
Joint dimensions	9x12 mm 14x18 mm
Operation mode	Peak/Track*
Batteries	AAx2
Battery operation time	110 h
Battery life (standby)	1 year
Working temperature	-10°C ~ 60°C
Storage temperature	-20 °C ~ 70 °C
Web calibration	•

*Track mode: Direct torque value / Peak mode: Max. torque Value

COD.	Description	L (m)
57573	USB cable	1,2



INTERCHANGEABLE HEADS 9x12

MM

COD.	Description	AF mm	mm
56250	Open heads	7	9 x 12
56251		8	
56252		9	
56253		10	
56254		11	
56255		12	
56256		13	
56257		14	
56258		15	
56259		16	
56260		17	
56261		18	
56262		19	



MM

COD.	Description	AF mm	mm
56264	Box heads	7	9 x 12
56265		8	
56266		9	
56267		10	
56268		11	
56269		12	
56270		13	
56271		14	
56272		15	
56273		16	
56274		17	
56275		18	
56276		19	
56277		21	
56278		22	



INCH

COD.	Description	AF inch	mm
56445	Open heads	1/4	9 x 12
56446		5/16	
56447		3/8	
56448		7/16	
56449		1/2	
56450		9/16	
56451		5/8	
56452		11/16	
56453		3/4	



INCH

COD.	Description	AF inch	mm
56454	Box heads	5/16	9 x 12
56455		3/8	
56456		7/16	
56457		1/2	
56458		9/16	
56459		5/8	
56460		11/16	
56461		3/4	
56462		13/16	
56463		7/8	



COD.	Description	AF inch	Teeth	mm
57563	Ratchet heads	1/4	52	9 x 12
57564		3/8		
57562		1/2		



COD.	Description	AF inch	Teeth	mm
56246	Ratchet heads	1/4	45	9 x 12
56247		3/8		
56248		1/2		



COD.	Description	AF inch	Teeth	mm
57595	Ratchet heads	1/4	52	9 x 12
57596		3/8		
57597		1/2		



MM

COD.	Description	AF mm	mm
56279	Box open heads	10	9 x 12
56280		11	
56281		12	
56282		13	
56283		14	
56284		16	
56285		17	
56286		18	
56287		19	
56288		21	
56289		22	



COD.	Description	CAP. (mm)	mm
56291	Adjustable head	5-30	9 x 12



INTERCHANGEABLE HEADS 14x18

MM

COD.	Description	AF mm	mm
64869	Open heads	8	14 x 18
64870		9	
64871		10	
64872		11	
64873		12	
65369		13	
65370		14	
65371		15	
65372		16	
65373		17	
65374		18	
65375		19	
65376		21	
65377		22	
65378		24	
65379		26	
65380		27	
65381		29	
65382	30		
65383	32		



MM

COD.	Description	AF mm	mm
64875	Box heads	13	14 x 18
64876		14	
64877		15	
64878		16	
64879		17	
64880		18	
64881		19	
64882		21	
64883		22	
64884		24	
64885		27	
64886		30	
64887		32	



INCH

COD.	Description	AF inch	mm
56464	Open heads	1/2	14 x 18
56465		9/16	
56466		5/8	
56467		11/16	
56468		3/4	
56469		13/16	
56470		7/8	
56471		15/16	
56472		1	
56473		1.1/8	
56474		1.1/4	



INCH

COD.	Description	AF inch	mm
56475	Box heads	1/2	14 x 18
56476		9/16	
56477		5/8	
56478		11/16	
56479		3/4	
56480		13/16	
56481		7/8	
56482		15/16	
56483		1	



COD.	Description	CAP. (mm)	mm
56292	Adjustable head	10-41	14 x 18



COD.	Description	AF inch	Teeth	mm
65384	Ratchet heads	3/8	24	14 x 18
65385		1/2	45	
65290		3/4	45	



COD.	Description	AF inch	Teeth	mm
57572	Ratchet heads	1/2	52	14 x 18



COD.	Description	AF inch	Teeth	mm
57598	Ratchet heads	1/2	52	14 x 18
57599		3/4	52	

