

SLIM OPEN-END WRENCHES

EGA Master's slim open-end wrenches are the very best solution for tightening and loosening operations in confined spaces, for example in automotive, aerospace and marine applications.

Ultra-slim




1. Designed for use in low and poor access areas and for locknuts.

2. Walls **30% slimmer** than conventional open-end wrenches.

3. Manufactured from **chrome-vanadium** steel, this wrench is designed to support high torque values without breaking, providing increased durability.


SLIM OPEN-END WRENCHES MM

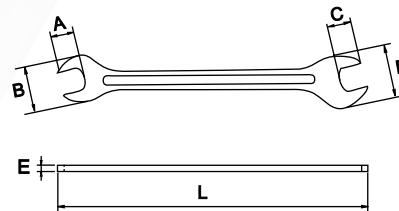

COD	AF	L mm	A	B	C	D	E	gr.		
56200	6x7mm	150	7	17	8	20	2.2	21		
56201	8x9mm	175	9	21	10	25	2.6	40		
56202	10x11mm	210	11	29	12	34	3.6	85		
56203	12x13mm	210	13	29	14	34	3.6	85		
56204	14x15mm	210	16	29	17	34	3.6	85		
56205	16x17mm	250	18	38	18	43	4.6	170	10	1
56206	18x19mm	250	20	38	21	43	4.6	170	10	1
56207	20x22mm	290	24	49	26	55	5.6	330	10	1
56208	21x23mm	290	24	49	26	55	5.6	330	10	1
56209	22x24mm	290	24	49	26	55	5.6	330	10	1

Cr-V ISO 3318

SLIM OPEN-END WRENCHES INCHES

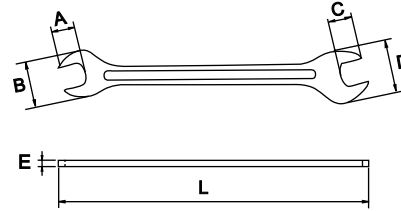

COD	AF	L mm	A	B	C	D	E	gr.		
56210	1/4"x5/16"	150	7	17	8	20	2.2	21		
56211	5/16"x3/8"	175								
56212	3/8"x7/16"		11	21	12					
56213	7/16"x1/2"		13		14					
56214	1/2"x9/16"	210	16	29	17	34	3.6	85	10	1
56215	5/8"x11/16"		18		18					
56216	11/16"x3/4"	250	20	38	21	43	4.6	175		
56217	13/16"x7/8"	290	24	49	26	55	5.6	330		

Cr-V

SLIM OPEN-END WRENCHES SET

COD	UN.	
56226	6	8x9, 10x11, 12x13, 14x15, 16x17, 18x19
56227	10	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 22x24
56228	6	3/8"x7/16", 7/16"x1/2", 1/2"x9/16", 5/8"x11/16", 11/16"x3/4", 13/16"x7/8"
56229	8	1/4"x5/16", 5/16"x3/8", 3/8"x7/16", 7/16"x1/2", 1/2"x9/16", 5/8"x 11/16", 11/16"x3/4", 13/16"x7/8"



TECHNICAL SPECIFICATIONS

MATERIAL	Cr-V
GENERAL HARDNESS	44-50 HRc
FINISHING	Aerospatial Chrome Plating

UNLIMITED GUARANTEE