



Main

| | |
|---|---|
| Range | TeSys TeSys Deca |
| Product name | TeSys D TeSys Deca |
| Product or component type | Contactor |
| Device short name | LC1D |
| Contactor application | Resistive load Motor control |
| Utilisation category | AC-4 AC-1 AC-3 AC-3e |
| Poles description | 3P |
| Pole contact composition | 3 NO |
| [Ue] rated operational voltage | Power circuit: <= 690 V AC 25...400 Hz Power circuit: <= 300 V DC |
| [Ie] rated operational current | 18 A (at <60 °C) at <= 440 V AC AC-3 for power circuit 32 A (at <60 °C) at <= 440 V AC AC-1 for power circuit 18 A (at <60 °C) at <= 440 V AC AC-3e for power circuit |
| Motor power kW | 4 KW at 220...230 V AC 50/60 Hz (AC-3) 7.5 KW at 380...400 V AC 50/60 Hz (AC-3) 9 KW at 415...440 V AC 50/60 Hz (AC-3) 10 KW at 500 V AC 50/60 Hz (AC-3) 10 KW at 660...690 V AC 50/60 Hz (AC-3) 4 KW at 400 V AC 50/60 Hz (AC-4) 4 KW at 220...230 V AC 50/60 Hz (AC-3e) 7.5 KW at 380...400 V AC 50/60 Hz (AC-3e) 9 KW at 415...440 V AC 50/60 Hz (AC-3e) 10 KW at 500 V AC 50/60 Hz (AC-3e) 10 KW at 660...690 V AC 50/60 Hz (AC-3e) |
| Motor power hp | 1 Hp at 115 V AC 50/60 Hz for 1 phase motors 3 Hp at 230/240 V AC 50/60 Hz for 1 phase motors 5 Hp at 200/208 V AC 50/60 Hz for 3 phases motors 5 Hp at 230/240 V AC 50/60 Hz for 3 phases motors 10 Hp at 460/480 V AC 50/60 Hz for 3 phases motors 15 Hp at 575/600 V AC 50/60 Hz for 3 phases motors |
| Control circuit type | AC at 50/60 Hz |
| [Uc] control circuit voltage | 48 V AC 50/60 Hz |
| Auxiliary contact composition | 1 NO + 1 NC |
| [Uimp] rated impulse withstand voltage | 6 KV conforming to IEC 60947 |
| Overvoltage category | III |
| [Ith] conventional free air thermal current | 10 A (at 60 °C) for signalling circuit 32 A (at 60 °C) for power circuit |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|--|--|
| Irms rated making capacity | 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 300 A at 440 V for power circuit conforming to IEC 60947 |
| Rated breaking capacity | 300 A at 440 V for power circuit conforming to IEC 60947 |
| [Icw] rated short-time withstand current | 145 A 40 °C - 10 s for power circuit 240 A 40 °C - 1 s for power circuit 40 A 40 °C - 10 min for power circuit 84 A 40 °C - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit |
| Associated fuse rating | 10 A gG for signalling circuit conforming to IEC 60947-5-1 50 A gG at ≤ 690 V coordination type 1 for power circuit 35 A gG at ≤ 690 V coordination type 2 for power circuit |
| Average impedance | 2.5 MOhm - Ith 32 A 50 Hz for power circuit |
| [Ui] rated insulation voltage | Power circuit: 690 V conforming to IEC 60947-4-1 Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified |
| Electrical durability | 1.65 Mcycles 18 A AC-3 at Ue ≤ 440 V 1 Mcycles 32 A AC-1 at Ue ≤ 440 V 1.65 Mcycles 18 A AC-3e at Ue ≤ 440 V |
| Power dissipation per pole | 2.5 W AC-1 0.8 W AC-3 0.8 W AC-3e |
| Protective cover | With |
| Mounting support | Rail Plate |
| Standards | CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 IEC 60335-1 |
| Product certifications | GL RINA UL CSA DNV BV GOST LROS (Lloyds register of shipping) CCC UKCA |
| Connections - terminals | Control circuit: screw clamp terminals 1 cable(s) 1...4 mm ² flexible without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm ² flexible without cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm ² flexible with cable end Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm ² flexible with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm ² solid without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm ² solid without cable end Power circuit: screw clamp terminals 1 cable(s) 1.5...6 mm ² flexible without cable end Power circuit: screw clamp terminals 2 cable(s) 1.5...6 mm ² flexible without cable end Power circuit: screw clamp terminals 1 cable(s) 1...6 mm ² flexible with cable end Power circuit: screw clamp terminals 2 cable(s) 1...4 mm ² flexible with cable end Power circuit: screw clamp terminals 1 cable(s) 1.5...6 mm ² solid without cable end Power circuit: screw clamp terminals 2 cable(s) 1.5...6 mm ² solid without cable end |
| Tightening torque | Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver- pozidriv No 2 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver- pozidriv No 2 |

| | |
|--------------------------|--|
| Operating time | 12...22 ms closing 4...19 ms opening |
| Safety reliability level | B10d = 1369863 cycles contactor with nominal load conforming- to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming- to EN/ISO 13849-1 |
| Mechanical durability | 15 Mcycles |
| Maximum operating rate | 3600 Cyc/H 60 °C |

Complementary

| | |
|---------------------------------|---|
| Coil technology | Without built-in suppressor module |
| Control circuit voltage limits | 0.3...0.6 Uc (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.1 Uc (-40...60 °C):operational AC 50 Hz 0.85...1.1 Uc (-40...60 °C):operational AC 60 Hz 1...1.1 Uc (60...70 °C):operational AC 50/60 Hz |
| Inrush power in VA | 70 VA 60 Hz cos phi 0.75 (at 20 °C) 70 VA 50 Hz cos phi 0.75 (at 20 °C) |
| Hold-in power consumption in VA | 7.5 VA 60 Hz cos phi 0.3 (at 20 °C) 7 VA 50 Hz cos phi 0.3 (at 20 °C) |
| Heat dissipation | 2...3 W at 50/60 Hz |
| Auxiliary contacts type | Type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1 |
| Signalling circuit frequency | 25...400 Hz |
| Minimum switching current | 5 MA for signalling circuit |
| Minimum switching voltage | 17 V for signalling circuit |
| Non-overlap time | 1.5 Ms on de-energisation between NC and NO contact 1.5 Ms on energisation between NC and NO contact |
| Insulation resistance | > 10 MOhm for signalling circuit |

Environment

| | |
|---------------------------------------|--|
| IP degree of protection | IP20 front face conforming to IEC 60529 |
| Protective treatment | TH conforming to IEC 60068-2-30 |
| Pollution degree | 3 |
| Ambient air temperature for operation | -40...60 °C 60...70 °C with derating |
| Ambient air temperature for storage | -60...80 °C |
| Operating altitude | 0...3000 m |
| Fire resistance | 850 °C conforming to IEC 60695-2-1 |
| Mechanical robustness | Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz Shocks contactor open: 10 Gn for 11 ms Shocks contactor closed: 15 Gn for 11 ms |
| Height | 77 Mm |
| Width | 45 Mm |
| Depth | 86 Mm |
| Net weight | 0.33 Kg |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 360.571 G |
| Package 1 Height | 5 Cm |
| Package 1 width | 9 Cm |
| Package 1 Length | 11 Cm |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 20 |
| Package 2 Weight | 7.442 Kg |
| Package 2 Height | 15 Cm |
| Package 2 width | 30 Cm |
| Package 2 Length | 40 Cm |

| | |
|------------------------------|------------|
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 320 |
| Package 3 Weight | 127.072 Kg |
| Package 3 Height | 75 Cm |
| Package 3 width | 80 Cm |
| Package 3 Length | 60 Cm |


Offer Sustainability

| | |
|----------------------------|---|
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

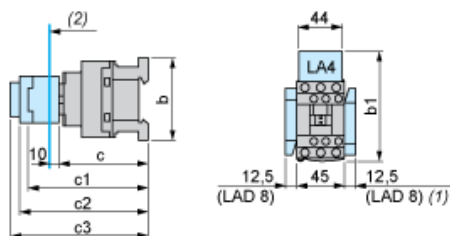


(1) Including LAD 4BB

(2) Minimum electrical clearance

| LC1 | | D09...D18 | D093...D123 | D099...D129 |
|------------------------------------|-----------------------------------|--------------------|----------------------|-------------|
| b | without add-on blocks | 77 | 99 | 80 |
| b1 | with LAD 4BB | 94 | 107 | 95.5 |
| with LA4 D10 | 110 ⁽¹⁾ | 123 ⁽¹⁾ | 111.5 ⁽¹⁾ | |
| with LA4 D11 | 119 ⁽¹⁾ | 132 ⁽¹⁾ | 120.5 ⁽¹⁾ | |
| with LA4 D12 | 126 ⁽¹⁾ | 139 ⁽¹⁾ | 127.5 ⁽¹⁾ | |
| c | without cover or add-on blocks | 84 | 84 | 84 |
| c1 | with LAD N or C (2 or 4 contacts) | 117 | 117 | 117 |
| c2 | with LA6 DK10, LAD 6K10 | 129 | 129 | 129 |
| c3 | with LAD T, R, S | 137 | 137 | 137 |
| with LAD T, R, S and sealing cover | 141 | 141 | | |
| (1) | Including LAD 4BB. | | | |

Wiring

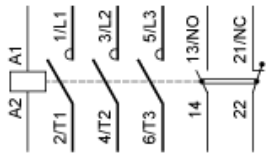

| | |
|-----------------------|----------------|
| Product Life Status : | Commercialised |
|-----------------------|----------------|