



Main

| | |
|--|----------------------------------|
| Range of product | Harmony Electromechanical Relays |
| Series name | Miniature |
| Product or component type | Plug-in relay |
| Device short name | RXM |
| Contacts type and composition | 3 C/O |
| [Uc] control circuit voltage | 24 V DC |
| [Ithe] conventional enclosed thermal current | 10 A at -40...55 °C |
| Status LED | With |
| Control type | Lockable test button |
| Utilisation coefficient | 20 % |

Complementary

| | |
|--|---|
| Shape of pin | Flat |
| [Ui] rated insulation voltage | 250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL |
| [Uimp] rated impulse withstand voltage | 4 KV during 1.2/50 µs |
| Contacts material | AgNi |
| [Ie] rated operational current | 10 A at 28 V (DC) NO conforming to IEC 10 A at 250 V (AC) NO conforming to IEC 5 A at 28 V (DC) NC conforming to IEC 5 A at 250 V (AC) NC conforming to IEC 10 A at 30 V (DC) conforming to UL 10 A at 277 V (AC) conforming to UL |
| Maximum switching voltage | 250 V conforming to IEC |
| Load current | 10 A at 250 V AC 10 A at 28 V DC |
| Maximum switching capacity | 2500 VA/280 W |
| Minimum switching capacity | 170 mW at 10 mA, 17 V |
| Operating rate | <= 1200 cycles/hour under load <= 18000 cycles/hour no-load |
| Mechanical durability | 10000000 Cycles |
| Electrical durability | 100000 Cycles for resistive load |
| Average coil consumption | 0.9 W |
| Drop-out voltage threshold | >= 0.1 Uc |
| Operating time | 20 ms |
| Reset time | 20 Ms |
| Average resistance | 650 Ohm at 20 °C +/- 10 % |

| | |
|----------------------------------|------------------------|
| Rated operational voltage limits | 19.2...26.4 V DC |
| Safety reliability data | B10d = 100000 |
| Protection category | RT I |
| Test levels | Level A group mounting |
| Operating position | Any position |
| CAD overall height | 82.8 Mm |
| CAD overall depth | 80.35 Mm |
| Net weight | 0.037 Kg |
| Device presentation | Complete product |



Environment

| | |
|---------------------------------------|---|
| Dielectric strength | 1300 V AC between contacts with micro disconnection 2000 V AC between coil and contact 2000 V AC between poles |
| Product certifications | UL CE CSA GOST Lloyd's |
| Standards | EN/IEC 61810-1 CSA C22.2 No 14 UL 508 |
| Ambient air temperature for storage | -40...85 °C |
| Ambient air temperature for operation | -40...55 °C |
| Vibration resistance | 3 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles in operation 5 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles not operating |
| IP degree of protection | IP40 conforming to EN/IEC 60529 |
| Shock resistance | 10 gn for in operation 30 gn for not operating |
| Pollution degree | 2 |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 0.037 Kg |
| Package 1 Height | 21.07 Mm |
| Package 1 width | 27.24 Mm |
| Package 1 Length | 46.25 Mm |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Weight | 0.39 Kg |
| Package 2 Height | 2.9 Cm |
| Package 2 width | 11.1 Cm |
| Package 2 Length | 13.3 Cm |
| Unit Type of Package 3 | S02 |
| Number of Units in Package 3 | 240 |
| Package 3 Weight | 10.271 Kg |
| Package 3 Height | 15 Cm |
| Package 3 width | 30 Cm |
| Package 3 Length | 40 Cm |

Offer Sustainability


| | |
|--------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation |  REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration |
| Toxic heavy metal free | Yes |

| | |
|----------------------------|---|
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

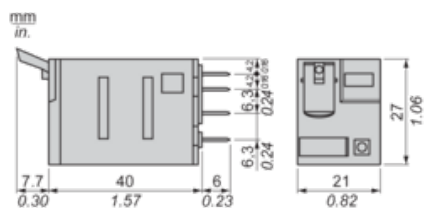

Pin Side View



Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

Resistive AC load



X Switching capacity (kVA)

Y Durability (Number of operating cycles)


A RXM2AB...

B RXM3AB...

C RXM4AB...


D RXM4GB...

Reduction coefficient for inductive AC load (depending on power factor $\cos \phi$)



Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load



X Voltage DC

Y Current DC

A RXM2AB...

B RXM3AB...

C RXM4AB...

D RXM4GB...

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Product Life Status : **Commercialised**